


PICTURE & DIMENSIONS




Product Name	LED spotlight	Item No.	CUBE2355IP
physical properties		Optical properties	
Body Material: Die-cast aluminum+tempered glass Body color:Black Installation method: U-Bracket mounting light size: 100*130 mm		Beam angle: 55°	
Light source parameters		Electrical properties	
Light source: LED CREE 1820 LED QTY: 1 PCS LED COLOR: 4000K CRI 80 VF (Voltage): AC220V Average lifespan: 50000 H		Wattage: 23W Input voltage: AC220V 50/60Hz Operating temperature: -25℃- +45℃ Control mode:ON/OFF	
Power supply performance		Protection class	
Supply voltage: AC220V voltage range: AC220V		IP grade: IP65 Electrical protection level: Class I	


Installation Instructions

1. The input voltage of the lamp is AC220V (make sure the voltage is correct), otherwise the light source will be damaged.
2. 3*0.75 square rubber cables for power supply
3. When connecting the external power supply, please install leakage protection device and overload protection device, and install it in the rainproof electrical box.
4. When installing the lamp, it must be reliably grounded.
5. After using the lamp, under normal circumstances, it needs to be cleaned once every six months to remove dust and wipe it with soft gauze, which is conducive to the lighting effect of the lamp.
6. The power must be cut off when installing and repairing the lamp.
7. The wire ends that are not used during the installation process should be waterproofed.

Connection Diagram

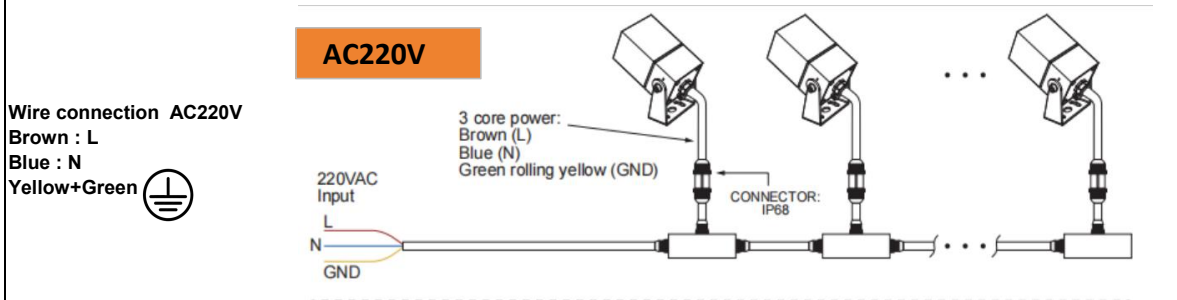

WARNING

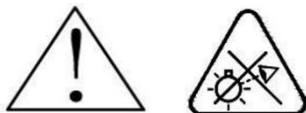

1. Lamps should be installed by a qualified electrician, and the wiring should comply with IEE electrical standards or national standards.
2. Installation should seek the advice of a qualified person.
3. Do not turn on the power during the wiring process.
4. Please protect children and make corresponding warning signs
5. The external flexible wire of the lamp cannot be replaced. When damaged, the lamp will be scrapped.
6. Lamps should be installed at a distance of 2 meters away from the human eye.
7. The light source of this luminaire is irreplaceable. When the light source reaches the end of its life, the entire luminaire should be replaced.
8. Please ensure the effective connection of the power cord and the signal line, and the wiring box IP67.
9. The insulation protection level of the lamp control end and the power input end is to strengthen the insulation.
10. Please protect the connector for the second time. First, weave it with waterproof tape, and then reinforce it with electrical tape.

SERVICE NOTES

This lamp has IP65 waterproof ,but please try to avoid using it in harsh environments with severe humidity or severe dust.
 This manual is only for operation guide and not base of inspection test
 This manual only for reference, all the sales product photo,technical etc. base of actual customization.